
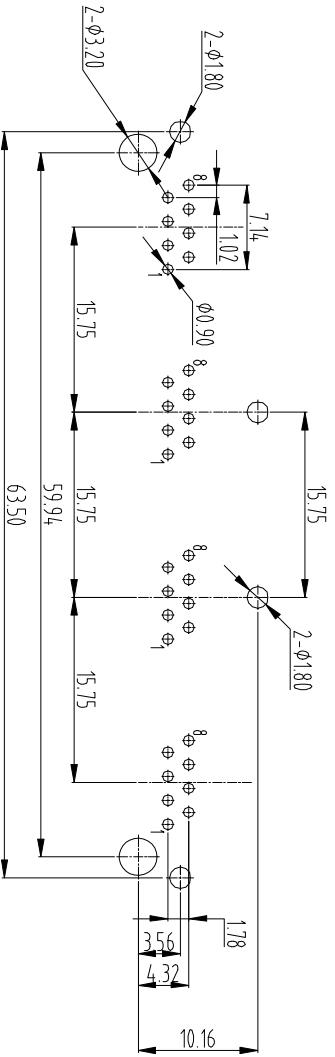
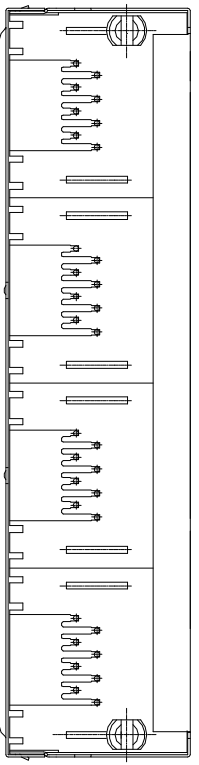


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 1X4 PORT 8P8C 无弹带灯	MJ5688-XX14-HPRD1

由原零件号: MJ5688-BX14-R1
变更为零件号: MJ5688-XX14-HPRD1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01			KELLY	2008.09.22
A02		新增塑胶选项	KELLY	2016.08.13

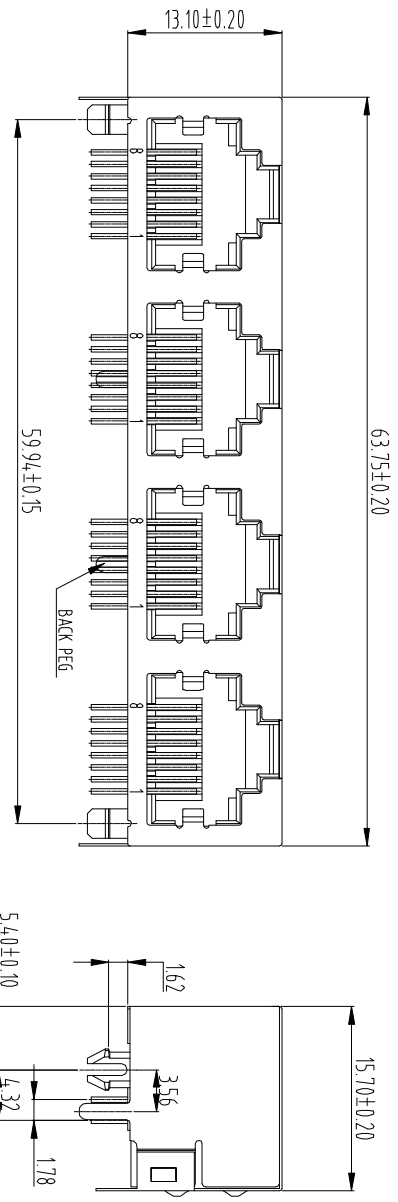

PCB LAYOUT/TOP VIEW

MJ5688-XX14-HPRD1

X	HOSIJING COLOR
B	BLACK
Y	YELLOW
U	BLUE

X	Terminal Plating
0	Au GF Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

NOTES:

MATERIAL:

- 1.HOUSING :GLASS FILLED POLYESTER UL94V-0
- 2.CONTACT (ROUND PIN $\phi 0.46mm$) :PHOSPHOR BRONZE WITH GOLD PLATING OVER NICKEL.
:0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
- 3.SHIELD

ELECTRICAL:

- 1.VOLTAGE RATING :125V AC.
- 2.CURRENT RATING :1.5AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN.@ 500V DC.
- 5.DIELECTRIC WITHSTANDING VOLTAGE :1000V AC RMS 50HZ OR 60HZ; 1MIN.

MECHANICAL:

- 1.INSETION FORCE :22kg MAX.
- 2.RETENTION STRENGTH :1.7kg BETWEEN JACK AND PLUG
- 3.DURABILITY :50 CYCLES MIN.

ENVIRONMENTAL:

- 1.STORAGE :-40°C~+85°C.
- 2.OPERATION :-40°C TO 85°C.

THE MARTS MODULAR PLUG CONFORMING TO FCC PART168

東莞市合陵電子有限公司
DongGuan Heling Electronic Co.,LTD

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO:
DECIMALS: X :±0.5	SIZE: A3	PAGE:1 OF 1	REV:A02
ANGLES: X :±2°	APPROVED BY	CHECKED BY	PREPARED BY
X.X :±0.3	TONY	BILL	KELLY
X.XX :±0.2	CUSTOMER COPY		